

Matrix Isolation Sublimation (MISu) to generate ${}^6\text{Li} - {}^7\text{Li}$ atoms for high resolution spectroscopy.

A N Oliveira^{1,2}, **R L Sacramento**², **B A Silva**², **F O Uhlmann**^{2,3}, **W Wolf**²,
C L Cesar²

¹ INMETRO, Av. Nossa Senhora das Graças, 50, 25250-020 Duque de Caxias, RJ, Brazil

² Instituto de Física, UFRJ, Caixa Postal 68528, 21941-972 Rio de Janeiro, RJ, Brazil

³ Beuth University of Applied Science, Zip Code 13353, Berlin, Germany

E-mail: anunes@inmetro.gov.br

Abstract: We propose the Matrix Isolation Sublimation (MISu) technique for generating cold lithium stable atoms for the measurement of the ${}^6\text{Li} - {}^7\text{Li}$ isotope shift in D1 and D2 transitions. The technique is capable of generating cold ${}^6\text{Li}$ and ${}^7\text{Li}$ beams at 4 K with forward velocity of 125 m/s. Using this beam we offer a distinguished source of lithium atoms for transitions measurements, adding a new possibility to make high resolution spectroscopy and contributing with new results for the validation of theories and experiments.

Keywords: lithium, cold atoms, MISu, spectroscopy.

1. INTRODUCTION

The energy structure of lithium can be solved from *ab initio* calculations and their predictions are compatible with experimental results. The fact that both results, experimental as theoretical, are within the same accuracy makes lithium atoms of great interest. In 2000 Yan and Drake [1, 2] proposed a combined theoretical and experimental approach to determine the relative nuclear charge radii based on the Splitting Isotopic Shift (SIS – difference for D1 or D2 line between different isotopes) (figure 1). Unfortunately, theoretical and experimental results still revealed discrepancies as discussed in [3]. Since previous measurements were done using an effusive atomic beam at temperature around 400 °C, including the recent one made in 2013 [4], we propose the use of a cold beam of Li atoms instead.

The present work shows that the MISu can produce beams of ${}^6\text{Li}$ and ${}^7\text{Li}$. Cryogenic beams of Cr, ${}^7\text{Li}$, Ca, Cs and Li_2 molecules have been

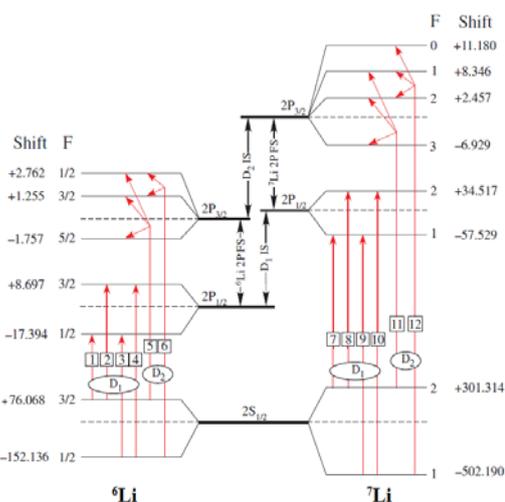


Figure 1. Lithium 6 and 7 isotopes energy levels, frequency shift relative to the state center of gravity energy ($E_{cg} = \sum_F (2F+1)E_F / \sum_F (2F+1)$) are shown in MHz [5].

produced from the sublimation of Ne or H₂ matrices [6–11].

2. EXPERIMENTAL SETUP

The basic experimental setup has been described in detail in [6] and a simplified diagram is shown in figure 2. The system consists of a closed-cycle cryostat that reaches 3 K at its cold plate with 1 W cooling power at 4 K. A sapphire substrate, with a deposited resistive NiCr film, is thermally connected, through a thermal link, to the cold plate. This configuration permits fast variations of the sapphire substrate temperature without affecting the cryostat temperature.

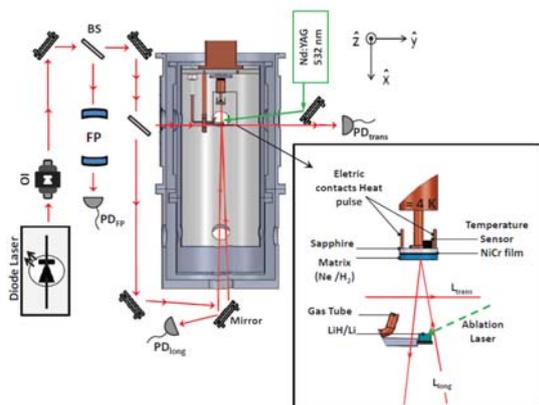


Figure. 2. Schematics of a typical setup for MISu showing the cryostat with optical access, and the laser beams for absorption spectroscopy. The zoom in the central region shows the sapphire substrate with its NiCr film resistor and the deposited matrix of Ne. For the study of lithium, the atoms are implanted via laser ablation (dashed green line) on a solid Li or LiH precursor. The spectroscopy laser beams (solid red line and identified as L_{long} and L_{trans}), propagate along or perpendicular to the direction of the sublimation plume expansion. The longitudinal laser is also used to monitor the matrix film thickness. The lasers' transmissions through the system are monitored by photodiodes (PD_{long} and PD_{trans}).

The gas that forms the matrix (Ne or H₂) is delivered through a 2 mm diameter tube whose exit points towards the sapphire substrate. The flow rate of the gas is controlled by the pressure in a reservoir followed by a high impedance line, achieving the 1–10 mmol/h. The growth of the matrix film is monitored by a CW laser beam – designated “longitudinal” – through the interference fringes (with 10–12% visibility) of the etalon formed by the Ne film together with the $\sim 40\%$ reflectivity of the NiCr resistive film on the sapphire substrate. This longitudinal beam comes from the bottom upwards, with slightly different angle, reflect off the Ne film and sapphire mirror at near normal incidence, and are monitored by photodiodes as indicated in figure 2 (PD_{long}). A typical time for growing a 330 nm thick Ne layer it is around 40 s, but it can be reduced to less than 1 s. Once the cryostat starts cooling and cryopumping the vacuum line below 5×10^{-6} Torr we close off the external vacuum pump line.

Once the matrix has been grown, or during its growth, a high-power pulsed laser promotes ablation of the solid precursor (Li or LiH), implanting the atoms into the matrix. After the matrix with the isolated atoms is completed, we apply a heat pulse to the sapphire causing the matrix, together with the implanted atoms, to sublimate into vacuum. The atomic spectrum in flight is registered while scanning the laser frequency. The longitudinal beam is both co-propagating and counter-propagating with the sublimation plume. This leads to a splitting of a resonance line due to a positive and a negative Doppler effect, allowing a direct measure of the sublimation plume drift velocity (figure 5), as well as the sample's longitudinal temperature. A second beam from the same laser designated “transverse”, propagates horizontally (transverse to the direction of propagation of the sublimation plume). The transverse beam is insensitive to the Doppler shift from the drift velocity of the plume

while allowing for the characterization of the transverse temperature of the sample. In the data presented here the CW laser is tuned to the ${}^7\text{Li}$ D1 and ${}^6\text{Li}$ D2 transitions at 670.795 nm. It is scanned at 2 kHz covering 4 GHz around the center frequency which is enough to detect both transitions. The frequency scan is monitored by a Fabry-Perot interferometer allowing corrections on the non-linear scan due to the PZT response of the laser.

3. EXPERIMENTAL RESULTS

The scan, around the central frequency 446 800 000 MHz, allows to cover the transitions labelled 5 – 10 in figure 1 since the frequency range of those transitions span around 1 GHz. We have used a LiH substrate and the expected proportion between ${}^6\text{Li}$ and ${}^7\text{Li}$ is respectively 7.5 % and 92.5 % [12].

Figure 3 shows a typical transverse absorption signal where the atoms transverse temperature was 2.5 K. Using the frequency difference between transition lines 5 to 10 from literature and estimating the relative intensity by

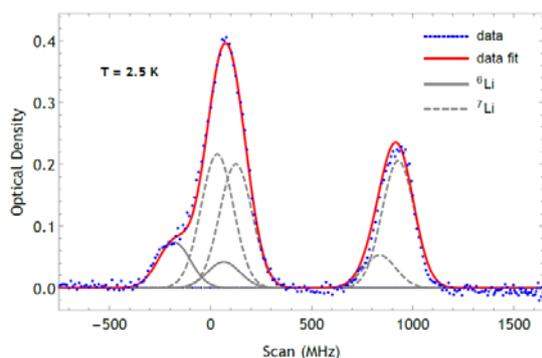


Figure. 3. Single scan of the transversal signal, converted to optical density. The full absorption signal is composed by 6 Gaussian distributions: 2 Gaussians originate from the ${}^6\text{Li}$ D2 transition – 5 and 6 (gray curves) – and 4 Gaussians from ${}^7\text{Li}$ D1 transition – 7, 8, 9, and 10 (dashed gray curves).

considering the isotopes proportion [13], it was possible to adjust a distribution that gives support to the presence of ${}^6\text{Li}$ and ${}^7\text{Li}$.

The advantage of the present technique is based on its versatility of operation on the choice of parameters governing the three steps of the method: matrix formation, ablation and sublimation. In order to achieve the best beam configuration for the experiment several sets of parameters can be chosen until exhausting the freedom of the method. The present set of parameters is not necessary the best configuration for the proposed experiment, the beam condition can be improved and made to last longer, achieving a quasi-cw condition.

In figure 4, a constant lithium beam is observed in the 5 to 15 ms range with a temperature between 3 – 5 K and longitudinal velocity of 120 – 130 m/s. A neon matrix of ~ 170 nm thickness was grown in 210 s and 200 ablations pulses were applied during its formation. After matrix completion with implanted atoms we sublimated it in a slow regime [8], using a heat pulse of 5.0 V for 15 ms. In this regime the matrix takes a while to start the sublimation (~ 5 ms). After this time the beam reaches an almost constant optical density regime, until the heat pulse is finished. The temperature was extracted from both transverse and longitudinal

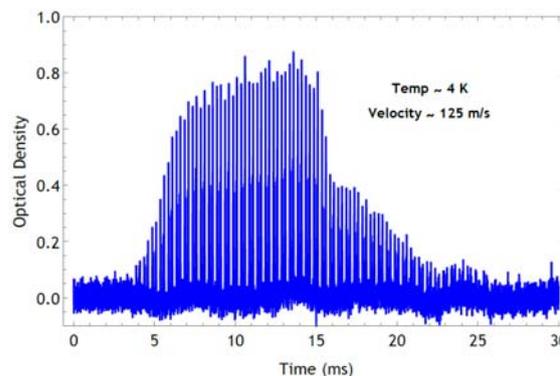


Figure 4. Reduced data with absorptions converted to optical density.

signal while the forward velocity was derived from the longitudinal signal. In figure 5 only one scan is depicted for illustration.

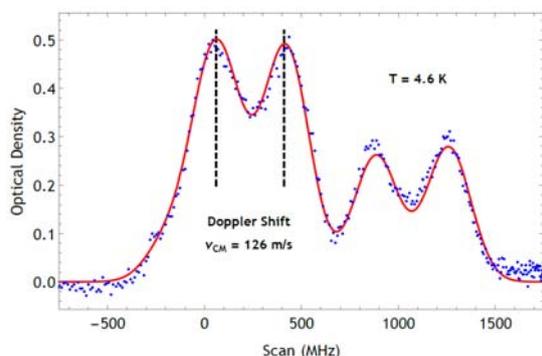


Figure 5. Reduced data for a single scan of longitudinal signal. Based on the Doppler shift the forward velocity is determined. Gaussian width is used to extract temperature. 12 Gaussian distributions were used in this fit. The same parameters used in the analysis of figure 3 are used here to determine the two shifted distributions.

4. CONCLUSION AND PROSPECTS

We observed the creation of a cold and slow atomic beam of ${}^6\text{Li}$ and ${}^7\text{Li}$, suitable for high resolution spectroscopy. Due to the flexibility of MISu technique we can further improve the beam properties, in particular, its lasting time can be increased. Transverse temperature can be also reduced if we use collimating orifices in the beam path. Our purpose is to use an optical frequency comb available in Inmetro in combination with this “MISu-beam” to measure the lithium isotopic shift. This proposal will be the first step of a joint project based on MISu technique and high resolution spectroscopy in Inmetro Optical Division (Diopt). Another goal is placed on measuring the hydrogen 1S-2S transition since this atomic species is also present when LiH is used as precursor.

Acknowledgments

This work is partially supported by the Brazilian institutions CNPq, CAPES, RENAFAE, and INCT-IQ.

REFERENCES

- [1] Yan Z C and Drake G W F 2000 *Phys. Rev. A* **61** 022504
- [2] Nörtershäuser N *et al.* 2011 *Phys. Rev. A* **83** 012516
- [3] Sansonetti C J, Simien C E, Gillaspay J D, Tan J N, Brewer S M, Brown R C, Wu S and Porto J V 2011 *Phys. Rev. Lett.* **107** 023001
- [4] Brown R C, Wu S, Porto J V, Sansonetti C J, Simien C E, Brewer S M, Tan J N and Gillaspay J D 2013 *Phys. Rev. A* **87** 032504
- [5] Das D and Natarajan V 2007 *Phys. Rev. A* **75** 052508
- [6] Sacramento R L, Oliveira A N, Alves B X, Silva B A, Li M S, Wolf W and Cesar C L 2015 *Rev. Scient. Inst.* **86** 073109
- [7] Oliveira A N, Sacramento R L, Alves B X, Silva B A, Wolf W and Cesar C L 2014 *J. Phys. B: At. Mol. Opt. Phys.* **47** 245302
- [8] Sacramento R L, Alves B X, Almeida D T, Wolf W, Li M S and Cesar C L 2012 *J. Chem. Phys.* **136** 154202
- [9] Sacramento R L, Scudeller L A, Lambo R, Crivelli P and Cesar C L 2011 *J. Chem. Phys.* **135** 134201
- [10] Crivelli P, Cesar C L and Lambo R 2009 *Can. J. Phys.* **87** 799
- [11] Lambo R, Rodegheri C C, Silveira D M and Cesar C L 2007 *Phys. Rev. A* **76** 061401(R)
- [12] Wijngaarden W A and Noble G A 2008 *Lect. Notes Phys.* **745** 11129
- [13] Noble G A, Schultz B E, Ming H and Wijngaarden W A 2006 *Phys. Rev. A* **74** 012502